

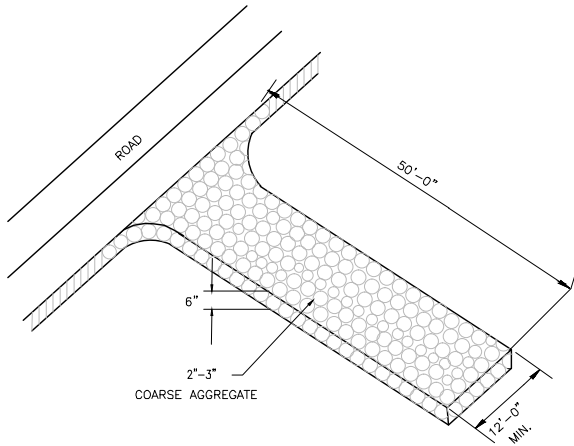


TEMPORARY SILT FENCE

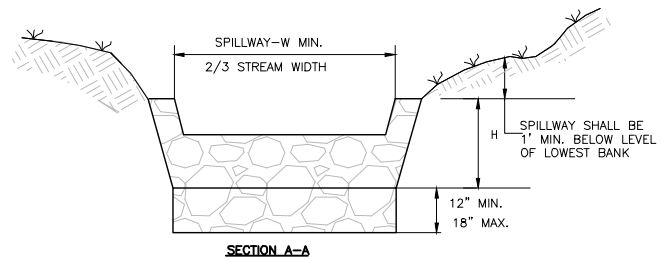

TEMPORARY CONSTRUCTION ENTRANCE

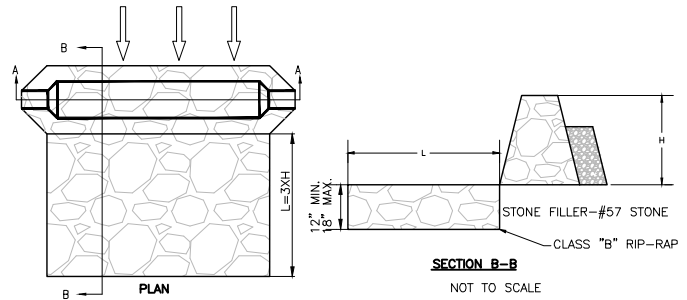


ROCK CHECK DAM

LAND DISTURBING ACTIVITIES MUST BE MANAGED TO AVOID SEDIMENT RUN-OFF AND POLLUTION FROM CONSTRUCTION SITES.

WHERE PERMITTED LOCALLY BY NEW HANOVER COUNTY, AN EROSION AND SEDIMENT CONTROL (E&SC) PLAN WILL CONTAIN DETAILS AND GUIDANCE. E&SC PLANS ARE PERFORMANCE BASED AND OFTEN REQUIRE ADJUSTMENTS OR REPAIRS.

AS PERMITTED BY NCDENR, DIVISIONS OF WATER QUALITY AND LAND RESOURCES, A STORMWATER PERMIT WILL REQUIRE SELF-MONITORING REPORTS (WEEKLY, >1" RAIN EVENT) OR SELF-INSPECTION REPORTS AFTER EACH CONSTRUCTION PHASE, BASED ON ELEMENTS OF THE E&SC PLAN.

| | | | | |
|------------|---------------------|---|--|---|
| | | STANDARD DETAIL | | <div><p>CITY OF WILMINGTON ENGINEERING PO BOX 1810 WILMINGTON, NC 28402 (910) 341-7807</p></div> |
| DATE: | SEPTEMBER, 2012 | <div>GUIDELINES FOR SEDIMENT CONTROL BMPs</div> | | |
| DRAWN BY | JSR | | | |
| CHECKED BY | BDR, P.E. | | | |
| SCALE | <u>NOT TO SCALE</u> | | | |
| | | SHEET 1 OF 2 | | <div>SD 3-104</div> |